





## Airports

Nowhere are luggage and goods dragged around more than at international airports. Movexx has come up with several solutions to allow this process to take place as easily and efficiently as possible. The T1000 and T2500 platform machines have been equipped with remote radio control, so that the work can be carried out with one instead of two or three staff.

Previously, it was only possible to move one roll container at a time



## Waste & Facility

In each market segment there is waste. The problem often lies in correctly and efficiently handling the waste. Disposing of waste in the right way and in the most efficient way can be a challenge for any company or institute. Movexx can help you with this. A large part of our machines can be used to optimise your waste management. Instead of moving one container by hand, you now move several at once. You realize profit in time, money and your back is grateful.







## Hospitality & Events

Hospitality is a coherent set of activities that includes professionally hosting guests. During an event, you want to focus on what is important at that moment. You need to be certain that the logistics flow is fast and efficient. The trolleys with drinks, laundry trolleys and other rolling stock should simply be in place when you expect them to be.

Movexx is your ideal partner in this. We ensure that your staff can transport several trolleys at the same time, without physical strain. Do you take care of your guests? We take care of you!



## Healthcare & Laundry

A healthy and ergonomic work environment is of vital importance in hospitals and care homes. There is heavy physical labour, for instance in moving hospital beds. Movexx has developed a simple 'bed mover' by means of which a large number of bed types can be moved. This helps to lighten the load, to reduce the number of staff and to cut costs. Working more efficiently as a result.



The roll containers are now moved efficiently and in an ergonomic-conscious way



## Food & Pharma

Gaps and seams in machinery are fatal for the pharmaceutical industry in particular. For that reason, Movexx has developed a series of Clean Room machines completely made of stainless steel. The laser welding technology ensures that dirt and bacteria have no chance of accumulating.






## Industry

Automotive sector producers make substantial use of transport trains, called milk runs, for internal transport. These milk runs consist of pallet bases with four caster wheels. Until now, it has not been possible to move these trolleys in a safe and rapid manner. The development of our RZ (Routenzug) machine has caused a change here.

The puller is  
that easy-to-use;  
everyone can work  
with it instantly

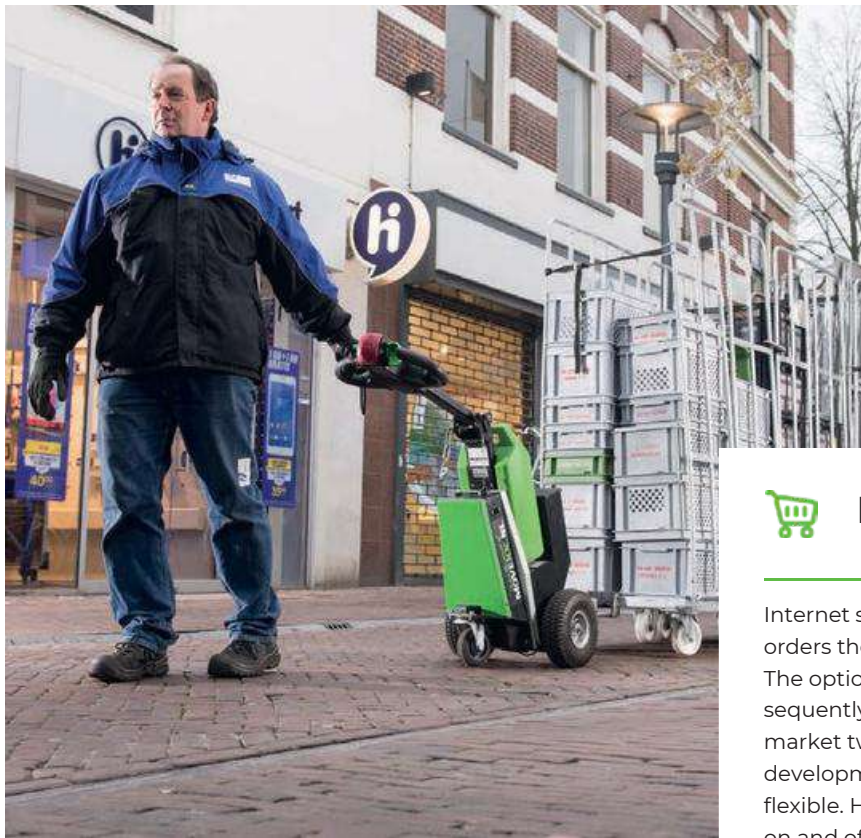

## Retail & Distribution

Internet sales are rising by the day. By contrast, the orders themselves are constantly reducing in size. The option of fully automated order picking is consequently also reduced. Movexx has placed on the market two platform machines especially for this development. Platform machines make staff very flexible. He or she does not need to walk, and getting on and off is very simple.

# Meet the family

All the Machines on [movexx.com](http://movexx.com)



Movexx T1000 ◊



Movexx T1000-Basic ◊



Movexx T1000-D ◊



Movexx T1500 ◊



Movexx P300



Movexx T2500-P



Movexx T2500 ◊



Movexx T3500



Movexx T6000 ◊



Bigtruxx 4.0



Movexx AGV1000



Movexx AGV1000-Underrider



Movexx T1000-Platform ◊

# Movexx makes your job easier!

Ergonomics and user-friendliness are a priority



## Leading

As 'born tractor manufacturers' we want to lead the market with innovative, distinctive solutions and excel in our field. That is why we invest in knowledge and work with enterprising people who know that it can always be done better and smarter.



## Authentic

We remain true to ourselves and determine our own course. We are proud of who we are, what we do and where we come from: a traditional Dutch manufacturing company with production entirely in our own hands.



## Inventive

Each assignment is unique, as is every solution. Through our years of experience we understand the challenges of our clients and are always ready to creatively translate our knowledge and understanding of the logistics process into new and workable solutions.



## Together

We believe that the good cooperation with each other and with our clients is the first step towards meeting the challenges of tomorrow. We want to strengthen each other as partners and form a winning team with our clients in order to realise their goals.



## Dedicated

We work with passionate commitment and full dedication on the result. This 'whatever it takes' mentality ensures that we are there when required – tenacious, unrelinquishing and only satisfied with a solution when the highest quality and high-tech design come together.







**TT1000-T**





The TT1000-T is the first electric tug developed by Movexx. Through the years, the TT1000-T has been further developed, and improved in both design and technique. Furthermore, the TT1000-T makes use of our characteristic exchangeable hook system, with which a hook for your trolley or cart can always be realized. TT1000-T is capable to move these, as long as the total load does not exceed 1000 kg.



#### Specifications

##### Power

DC motor 24V, 300W  
Maximum pulling power and speed up to 1000 KG  
Max. 4,7 Km/h, freely programmable

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Full rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

55 kg (incl. accu)  
920 mm  
438 mm

##### Work height

750-985 mm,  
Folded height: 770 mm







**TT1000-S**





The TT1000-S is an electric tug which is characterized by its relatively low construction. This makes it possible to install hooks and/or couplings on top of the electric tug. Because of its own weight, the TT1000-S is capable to generate traction with trailers, and carts with a pole.

#### Specifications

##### Power

DC motor 24V, 300W

Maximum pulling power and speed

Up to 1000 KG

4,7 Km/h, freely programmable

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Full rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

118 kg

445 mm

1176 mm

##### Work height

750-1155 mm (variable), Folded height: 770 mm





**TT1000-L**







The Movexx TT1000-L is a compact electric tug with an electric lifting device. The TT1000-L is characterized by the fact that one side of a cart is lifted from the ground to move the cart. TT1000-L can effortlessly move 1000 kg. This makes the tug perfectly suited for the market segments like industry and waste.

#### Specifications

##### Power

DC motor 24V, 300W

Maximum pulling power and speed

Up to 1000 KG, Lifting power: 500 KG

Max. 4,7 Km/h, freely programmable

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Vulcalon  $\varnothing 200 \times 55$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

105 kg

1278 mm

423 mm

##### Work height

1278 mm





**RR1000-S**





A Movexx RR1000-S is a standing variant of the Movexx TT1000-T, and ideal to use for longer distances. This electric tug can easily move trolleys, industrial carts, or roll containers on wheels, without you having to perform any physical exercise. The RR1000-S is mostly used in the logistical distribution in combination with Milk run systems.

#### Specifications

PowerDC motor 24V, 420W  
Maximum pulling power and speed  
Up to 1000 KG  
Max. 6,5 Km/h

#### Battery

Standard interchangeable Lithium LifePo4

#### Tire

Full rubber  $\varnothing 250 \times 80$  mm

#### Frame

Compact, Steel powdercoated

#### Weight and length

111 kg  
1226 mm  
450 mm

#### Work

height 750-1261 mm







**TT1000-F**





The distribution centers, large offices, and magazines had a large demand for an electric platform cart. We decided to heed the call, which result in the Movexx TT1000-F. The Movexx TT1000-F is an electric platform cart able to easily move 1000 kg. The machine has a loading platform of 800 mm wide and 1200 mm long. The flat loading platform makes sure a structure is possible. Think of a tool cabinet for example. Because of its versatility, this electric cart is suited for the following market segments: industry, supermarkets & retail, hospitals, airports, flower industry, waste management sector, caravan storage etc.

### Specifications

#### PowerDC motor

24V, 300W

Maximum pulling power and speed

Up to 1000 KG

Max. 4,7 Km/h

#### Battery

Standard interchangeable Lithium LifePo4

#### Tires

Full rubber ø250×80 mm

Frame

Compact Steel powdercoated

#### Weight and length

144 kg

1543 mm

800 mm

#### Work height

700 – 1275 mm (variable)





**TT1000-M**







The Movexx TT1000-M is a true multipurpose machine. The electrically driven tug consists of several modules that together offer numerous solutions for your intra-logistics problems. The drive module is easy to use and is characterized by its ergonomic design. The lift module, support structure and hook are often custom made to ensure that your TT1000-M fits perfectly in your situation.

### Specifications

**Power**  
 Motor 300W, 24V DC  
 Maximum pulling power and speed  
 Up to a 1000 KG  
 Max. 4,5 Km/h

**Battery**  
 Standard interchangeable Lithium  
 LifePo4

**Tires**  
 Blue polyurethane drive wheels Ø  
 200 x 60 mm

**Frame**  
 Compact, Steel powdercoated

**Weight and length**  
 80 kg  
 342 mm  
 412 mm

**Work height**  
 1223 mm





**TT1500-T**





The TT1500-T is an electric tug that can easily move trolleys and carts with a total weight of 1500 kg. Because of the exchangeable hook system, the TT1500-T can move a large range of carts and trolleys, such as roll containers, industrial carts, and waste containers.

#### Specifications

##### Power

DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 1500 KG  
Max. 4,7 Km/h

##### Battery

Standard interchangeable Lithium  
LifePo4

##### Tires

Full rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

105 kg  
876 mm  
483 mm

##### Work height

750-1177 mm (variable)







**TT1500-S**





The TT1500-S is an electric tug which is characterized by its relatively low construction. This makes it possible to install hooks and/or couplings on top of the electric tug. Because of its own weight, the TT1000-D is capable to generate traction with trailers, and carts with a pole. Combined with the fact that the TT1500-S always runs on three wheels for stability, the electric tug can be used for a great number of applications.

#### Specifications

##### Power

DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 1500 KG  
4 Km/h

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Full rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

164 kg  
1232 mm  
486 mm

##### Work height

750-1158 mm





**TT2500-S**





The Movexx TT2500-S is an electric tug, which generates traction by means of its own weight. The TT2500-S is mostly used in an environment in which carts already have a hook or a folding hook. The TT2500-S can also be expanded with a lifting module to use for carts without a hook. The electric tug can be equipped with an exchangeable battery system, making it easy to replace an empty battery with a charged one. Furthermore, it is a compact powerhouse that can move 2500 kg with ease

#### Specifications

##### Power

DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 2500 KG  
4 Km/h

##### Battery

Built-in 24 Volt, 75 Ah

##### Tires

Full rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

244 kg  
757 mm  
511 mm

##### Work height

700-1278 mm (variabel)







**TT2500-L**





The Movexx TT2500-L is a compact electric tug with an electric lifting device. Because the TT2500-L lifts a cart or trolley, more traction is generated, enabling the TT2500-L to effortlessly move 2500 kg. This makes the electric tug perfectly suited for the following market segments: industry and waste

#### Specifications

##### Power

DC motor 24V, 600W

Maximum pulling power and speed

Up to 2500 KG

4 Km/h

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Vulcolan ø200×55 mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

154 kg

1362 mm

478 mm

##### Work height

750-1053 mm (variable)





**CC 2500-S**





The CC2500-S is an electric tug that is able to move 2500 kg with ease. The design has been optimised to ensure that the operator is always in an ergonomic and comfortable position. As a result, the CC2500-S is mainly used for milk run purposes and industries where carts and trolleys need to be transported over longer distances. The use of this electric tug increases efficiency by allowing multiple carts to be transported at the same time. In addition, the advantage is that the user is not burdened, which reduces fatigue.

#### Specifications

##### Power

DC motor 24V, 800W

Maximum pulling power and speed

Up to 2500 KG

4 Km/h

##### Battery

Fixed AGM maintenance free

##### Tires

Solid rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

304 kg

1237 mm

511 mm

##### Work height

1075 mm







**TT 3500-S**





The Movexx TT3500-S is an electric tug, which generates traction by means of its own weight. The TT3500-S is mostly used in an environment in which carts already have a hook or a folding hook. The TT3500-S can also be expanded with a lifting module to use for carts without a hook. The electric tractor can be equipped with an exchangeable battery system, making it easy to replace an empty battery with a charged one. Furthermore, it is a compact powerhouse that can move 3500 kg with ease. Let the TT3500-S do all the work, relieving you. Your back will thank you.

### Specifications

#### Power

DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 3500 KG  
4 Km/h

#### Battery

Fixed AGM maintenance free

#### Tires

Full rubber  $\varnothing 250 \times 80$  mm

#### Frame

Compact, Steel powdercoated

#### Weight and length

310 kg  
915 mm  
511 mm

#### Work height

750-1269 mm (variable)





**RR 3500-S**





A Movexx RR3500-S is a standing variant of the Movexx TT3500-S, and ideal to use for longer distances. This electric tug can easily move trolleys, industrial carts, or roll containers on wheels, without you having to perform any physical exercise. The Movexx RR3500-S has an exchangeable battery system. An empty battery can be easily changed by moving the battery from the holder and inserting a charged battery. The electric tug has two adjustable speeds (fast and slow), a height adjustable drawbar head, backrest and a horn. Furthermore, you are standing on a checker plate for maximum grip. Because of the useful coupling mechanism, almost every load on wheels can be pulled. The RR3500-S is mostly used in the logistical distribution in combination with Milk run systems

#### Specifications

##### Power

24V AC; 1700W 1:32; S2

Maximum pulling power and speed

Up to 3500 KG

4 Km/h

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Full rubber ø300 x 90 mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

471 kg

1400 mm

691,5 mm

##### Work height

1370 mm







**TT 6000-S**





The Movexx TT6000-S is an electric tug, which generates traction by means of its own weight. The TT6000-S is mostly used in an environment in which carts already have a hook or a folding hook. The TT6000-S can also be expanded with a lifting module to use for carts without a hook. The electric tug can be equipped with an exchangeable battery system, making it easy to replace an empty battery with a charged one. Furthermore, it is a compact powerhouse that can move 6000 kg with ease. Let the TT6000-S do all the work, relieving you. Your back will thank you

#### Specifications

Power  
DC motor 24V, 1100W  
Maximum pulling power and speed  
Up to 6000 KG  
4 Km/h

Battery  
Fixed AGM maintenance free

Tires  
Full rubber ø250×80 mm

Frame  
Compact, Steel powdercoated

Weight and length

690 kg  
1000 mm  
807 mm

Work height  
1267 (variable)





**AA 1000-S BASIC**





The AA1000-S-Basic is an electric tug capable of following an optical route (such as a closed loop) completely autonomously. The electric tug is used for pulling trolleys with 2 castors and 2 fixed castors in the industrial intra logistics. The AA1000-S-Basic is able to semi-automatically couple carts. The electric tug is also able to decouple completely automatically, and the machine is very easy to operate. Because of the attractive pricing, it is an interesting model to start with in the world of automated vehicles. It is important, however, that the operator is able to start the AA1000-S-Basic himself. The AA1000-S-Basic is also able to read tags that gives commands to the AA1000-S-Basic like 'go slower'.

#### Specifications

##### Power

DC motor 24V, 300W

Maximum pulling power and speed

Up to 1000 KG

3,6 km/h

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Massief rubber  $\varnothing 250 \times 80$  mm

##### Frame

Compact, Steel powdercoated

##### Weight and length

120 kg

1051 mm

505 mm







**AA 1000-S**





The AA1000-S is a mid-end, automatically guided vehicle, capable of following an optic route completely autonomously. The electric tug can automatically couple and decouple trolleys with two castors and two fixed castors, and is mostly used in an industrial production environment and the physical distribution logistics. The AA1000-S is also capable of navigating various complex routes with switches and requires minimum maintenance. It is equipped with the function to read RFID tags, and is able to drive variable speeds up to 4.7 km/h.

#### Specifications

##### Power

300 W, 24 VDC, 100 rpm

Maximum pulling power and speed

Up to 1000 KG

Stepless to 4,7 Km/h

##### Battery

Standard interchangeable Lithium LifePo4

##### Tires

Full rubber  $\varnothing 250 \times 80$

##### Frame



Compact, Steel powdercoated

##### Weight and length

150 kg

1051 mm

505 mm

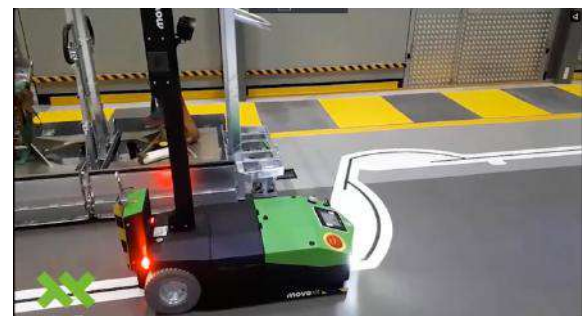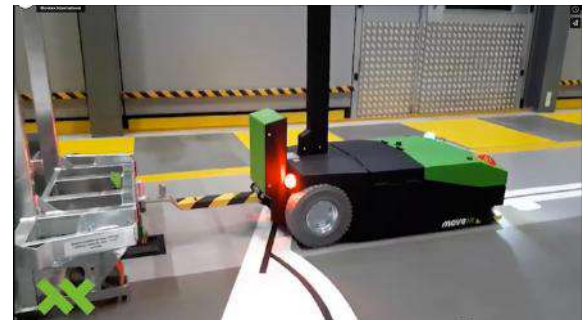



**AA 1000-S UNDER RIDER**





The AA1000-S-Underrider is a high-end automatically guided vehicle, specially designed for the bi-directional moving pallet undercarriages. The design has been optimized, so no adjustments are required to couple these pallet undercarriages with four castors. The electric tug is capable of following an optic route completely autonomously, and can be simply operated with a full color control panel. The AA1000-S-Underrider is mostly used for material handling in a production environment, where goods are already on existing pallet undercarriages. It is equipped with the function to read RFID-tags and is able to drive variable speeds up to 3.4 km/h.

#### Specifications

Power  
300 W, 24 VDC, 100 rpm  
Maximum pulling power and speed  
Up to 1000 KG  
Stepless to 3,4 Km/h

Battery  
Standard interchangeable Lithium LifePo4

Tires  
Solid rubber  $\varnothing 180 \times 80$

Frame  
Steel, powdercoated

Weight and length  
140 kg  
1726mm  
505 mm







**TT 6000-S**





The Movexx TT6000-S-Cleanroom is an electric tug, which generates traction by means of its own weight. The TT6000-S-Cleanroom is mostly used in an environment in which carts already have a hook or a folding hook. The TT6000-S-Cleanroom can also be expanded with a lifting module to use for carts without a hook. Furthermore, it is a compact powerhouse that can move 6000 kg with ease. Let the TT6000-S-Cleanroom do all the work, relieving you. Your back will thank you. With its compact design the TT6000-S-Cleanroom is considerably smaller than a forklift truck while not emitting any exhaust emissions. The TT6000-S-Cleanroom is also available in a lighter edition

#### Specifications

Power  
24V DC, 1100W  
Maximum pulling power and speed  
Up to 6000 KG  
4 Km/h

Battery  
Fixed AGM maintenance free

Tires  
Full rubber  $\varnothing 250 \times 80$  mm

Frame  
Sealed stainless steel frame

Weight and length

700 kg  
1125 mm  
858 mm

Work height  
750 - 1198 mm (variable)





**AA 2500-S**





The AA2500-S is a mid-end, automatically guided vehicle capable of following an optic route completely autonomously. The AA2500-S can automatically couple and decouple trolleys with two castors and two fixed castors and is mostly used in an industrial production environment and the physical distribution logistics. The AA2500-S is also capable of navigating various complex routes with switches and requires minimum maintenance. It is equipped with the function to read RFID tags, and is able to drive variable speeds up to 4.7 km/h.

#### Specifications

Power  
24V DC, 600W  
Maximum pulling power and speed  
Up to 2500 KG  
Stepless to 4,7 Km/h

Battery  
Standard interchangeable Lithium LifePo4


Tires  
Full Rubber  $\varnothing 250 \times 80$  mm

Frame  
Compact, Steel powdercoated

#### Weight and length

300 kg  
1209 mm  
505 mm

Work height  
326 mm

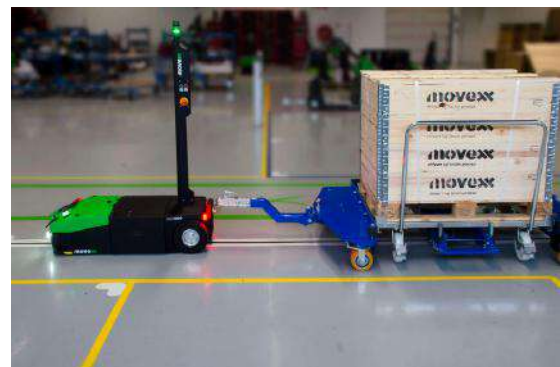



**TT 1000-T**







The TT1000-T-Inox is a variant of the Movexx TT1000-T. The electric tug completely consists of stainless steel, and can be simply thoroughly cleaned, making the TT1000-T-Inox a maintenance friendly electro tug. It is especially designed to meet the requirements in hygienic environments. Because of the smart and exchangeable hook system, the electric tug can be used for moving medical carts, work carts, medicine carts, distribution, transport carts, and cleaning trolleys. This makes the TT1000-T-Inox the ideal machine to increase efficiency and productivity in the logistics sector of a hospital

#### Specifications

Power  
DC motor 24V, 300W  
Maximum pulling power and speed  
Up to 1000 KG  
4 Km/h, freely programmable

Battery  
Fixed AGM maintenance free

Tires  
Full rubber  $\varnothing 250 \times 80$  mm, Non-Marking

Frame  
Sealed stainless steel frame

Weight and length  
55 kg  
920 mm  
438 mm

Work height  
750-958 mm (variable)





**TT 1000-T**





The RR1000-S-Inox is a stainless steel variant on the Movexx T1000-Platform. The electric tug completely consists of stainless steel, and can be simply thoroughly cleaned, making the RR1000-S-Inox a maintenance friendly electric tug. It is especially designed to meet the requirements in hygienic environments. Because of the smart and exchangeable hook system, the electric tug can be used for moving medical carts, work carts, medicine carts, distribution, transport carts, and cleaning trolleys. This makes the RR1000-S-Inox the ideal machine to increase efficiency and productivity in the logistics sector of a hospital.



#### Specifications

Power  
DC motor 24V, 420W  
Maximum pulling power and speed  
Up to 1000 KG  
4 Km/h

Battery  
Standard interchangeable Lithium LifePo4

Tires  
Full rubber  $\varnothing 250 \times 80$  mm, 2 fixed, 2 castors, 4 castors, 2 fixed

Frame  
Compact, stainless steel frame

Weight and length  
125 kg  
1226 mm  
450 mm

Work height  
750 – 1261 mm





**TT 1000-CLEAN ROOM**





The TT1000-T-Cleanroom is a variant to the Movexx TT1000-T, and is especially designed to pull carts and trolleys in a clean room environment. Because of the closed clean room wheels, much less culmination of dirt occurs, and the wheels do not give off dirt. Furthermore, the electric tug consists completely of stainless steel (INOX) and can be easily thoroughly cleaned, making the TT1000-T-Cleanroom a maintenance friendly electric tug

#### Specifications

Power  
DC motor 24V, 300W  
Maximum pulling power and speed  
Up to 1000 KG  
4 Km/h

Battery  
Fixed AGM maintenance free

Tires  
full rubber  $\varnothing 250 \times 80$  mm

Frame  
Sealed stainless steel frame

Weight and length  
57 kg  
767 mm  
462 mm

Work height 1055 mm







**TT 1500-T-CLEAN ROOM**





The TT1500-T-Cleanroom is a variant to the Movexx TT1500-T, and is especially designed to pull carts and trolleys in a clean room environment. Because of the closed clean room wheels, much less culmination of dirt occurs, and the wheels do not give off dirt. Furthermore, the electric tug consists completely of stainless steel (INOX) and can be easily thoroughly cleaned, making the TT1500-T-Cleanroom a maintenance friendly electric tug

#### Specifications

Power  
DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 1500 kg.  
4 Km/h

Battery  
Fixed AGM maintenance free

Tires  
Non marking, full rubber ø250×80 mm

Frame  
Sealed stainless steel frame

Weight and length  
105 kg  
771 mm  
511 mm

Work height  
1061 mm





**TT 2500-S-CLEAN ROOM**





The TT2500-S-Cleanroom is a variant to the Movexx TT2500-S, and is especially designed to pull carts and trolleys in a clean room environment. Because of the closed clean room wheels, much less culmination of dirt occurs, and the wheels do not give off dirt. Furthermore, the electric tug consists completely of stainless steel (UNOX) and can be easily thoroughly cleaned, making the TT2500-S-Cleanroom a maintenance friendly electric tug.

#### Specifications

Power  
DC motor 24V, 600W  
Maximum pulling power and speed  
Up to 2500 KG  
4 Km/h

Battery  
Fixed AGM maintenance free

Tires  
Non marking, full rubber  $\varnothing 250 \times 80$  mm

Frame  
Sealed stainless steel frame

Weight and length  
199 kg  
1147 mm  
513 mm

Work height  
1066 mm





**TT 1000-T-BASIC**







The TT1000-T-Basic is a base version of the Movexx TT1000-T. The compact electric tug pulls carts and trolleys with a weight to 1000 kg with ease. The built-in AGM battery can be charged simply with the built-in charging system. The ergonomically formed tiller head makes sure you automatically assume a responsible working posture, not taxing your back and shoulders. The TT1000-T-Basic makes use of our characteristic exchangeable hook system. When it turns out we need customized work, we are capable of realizing a hook that fits your cart. For every cart there is a hook, and that is brainpower.

#### Specifications

Power  
DC motor 24V, 300W  
Maximum pulling power and speed  
Up to 1000 KG  
4 Km/h


Battery  
Fixed AGM maintenance free

Tires  
Full rubber  $\varnothing 250 \times 80$  mm

Frame  
Steel powdercoated

Weight and length  
60 kg  
756 mm  
440 mm

Work height 1056 mm

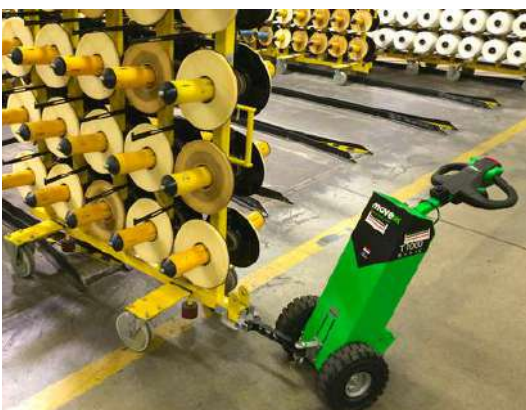



**TT 500-S-HH**





The Movexx TT500-S-HH (Bed Mover 500 Remote – Front Fork Connector) is an electric tug mostly used in hospitals to move hospital beds. Because of the compact design, the TT500-S-HH is capable of maneuvering in small spaces, such as small halls, hallways, and lifts. The TT500-S-HH can effortlessly move 500 kg loads, relieving your staff of moving heavy loads. The ergonomic design also guarantees that the user has the correct posture. The TT500-S-HH is standard equipped with a remote control, with which you can easily operate the electric tug, while you are at the end of the hospital bed to steer.

#### Specifications

Power  
24V DC, 300W  
Maximum pulling power and speed  
Up to 500 kg.  
Max. 4 km/h, free programmable

Battery  
Built-in, 24 V, 22 Ah

Tires  
Full rubber ø250 x 80 mm

Frame  
Steel, powder coated

Weight and length  
129 kg  
951 mm  
360 mm

Work height  
750-1200 mm (variable)





# MACHINERY

ADW MACHINERY DIVISION OF ADMIRAL WORLD GENERAL TRADING LLC

EXCLUSIVE DISTRIBUTERS OF



FOR SALES ENQUIRIES:

[info@admiralworld.com](mailto:info@admiralworld.com)

OUR ADDRESS:

P.O. BOX 112661, SHOWROOM 46,  
STR. 8, AL QUOZ 1, DUBAI, UAE

CHECK OUT  
OUR WEBSITE

